LIST OF PRODUCTS

HAND DRIVEN NAILS

COMMON NAILS

SINKER NAILS

BOX NAILS

DUPLEX NAILS

FINISH NAILS

ROOFING NAILS

JOIST HANGER NAILS

DECKING NAILS

CASING NAILS

DRYWALL NAILS

COLLATED NAILS

- 21° PLASTIC COLLATED STRIP NAILS
- 15° WIRE COLLATED COIL NAILS
- 15° WIRE COLLATED PALLET COIL NAILS
- 15° WIRE COLLATED SIDING/FENCING COIL NAILS
- 15° WIRE COLLATED ROOFING COIL NAILS
- 33° PAPER TAPE CLIPPED HEAD NAILS

COMMON NAILS

<u>Applications:</u> Common nails are the most popular nails in use today. They are the basic nail for most construction. These are usually available with flat heads and diamond points, common nails are used primarily for structural framing, scaffolding and general carpentry.

Material: Carbon Steel or Stainless Steel

Shank Type: Round Smooth Shank

Head Type: Flat Head

Point Type: Diamond Point

Finish: Bright, Zinc Coated or other coating as specified

Standard: ASTM F1667

Item	Diameter	Length	Packaging
Common 2D	0.071	1	
Common 3D	0.080	1-1/4	
Common 4D	0.099	1-1/2	
Common 5D	0.099	1-3/4	
Common 6 D	0.113	2	
Common 7D	0.113	2-1/4	
Common 8D	0.131	2-1/2	1LB x 25Packets: 64 Ctns / Pallet
Common 10D	0.148	3	5LB x 8Packets: 42 Ctns / Pallet
Common 12D	0.148	3-1/4	50LB: 48 Ctns / Pallet
Common 16D	0.162	3-1/2	
Common 20D	0.189	4	
Common 30D	0.207	4-1/2	
Common 40D	0.225	5	
Common 50D	0.244	5-1/2	
Common 60D	0.261	6	

SINKER NAILS

<u>Applications:</u> Steel wire nails with a countersunk head, diamond point, smooth shank. Used for General Construction, Carpentry and Framing. They are generally shorter and thinner than common nails. The vinyl coating on these nails provides lubrication when driving and increases holding power.

Material: Carbon Steel or Stainless Steel

Shank Type: Round Smooth Shank

Head Type: Flat Counter shank Cross Hetch Head

Point Type: Diamond Point

Finish: Green Vinyl coating or other coating as specif

Standard: ASTM F1667

Item	Diameter	Length	Packaging
Sinker 3D	0.067	1-1/8	
Sinker 4D	0.080	1-3/8	
Sinker 5D	0.086	1-5/8	
Sinker 6 D	0.092	1-7/8	
Sinker 7D	0.099	2-1/8	
Sinker 8D	0.113	2-3/8	1LB x 25Packets: 64 Ctns / Pallet
Sinker 10D	0.120	2-7/8	5LB x 8Packets: 42 Ctns / Pallet
Sinker 12D	0.135	3-1/8	50LB: 48 Ctns / Pallet
Sinker 16D	0.148	3-1/4	
Sinker 20D	0.177	3-3/4	
Sinker 30D	0.192	4-1/4	
Sinker 40D	0.207	4-3/4	
Sinker 60D	0.244	5-3/4	

BOX NAILS

Applications: Box Nails are used for light construction and rough works in soft woods. Box Nails are the same general design as common nails but are made of a smaller wire gauge. Because of their smaller diameter, they are easily driven and less likely to split wood.

Material: Carbon Steel or Stainless Steel


Shank Type: Round Deformed and Smooth Shar

Head Type: Flat Head

Point Type: Diamond Point

Finish: Bright, Zinc or other coating as specified

Standard: ASTM F1667

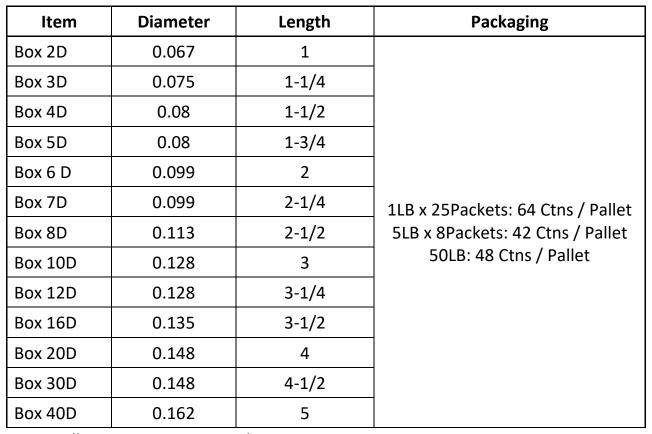

DUPLEX NAILS

Applications: Duplex Nails are used for scaffolding, forms and other temporary construction. They are easy to pull, safe and dismantling time, lumber and nails.

Material: Steel

Shank Type: Round Smooth Shank

Head Type: Flat Double Head

Point Type: Diamond Point

Finish: Bright, Zinc Coated

Standard: ASTM F1667



Item	Diameter	Length	Packaging
Duplex 6 D	0.113	1-3/4	
Duplex 8D	0.131	2-1/4	
Duplex 10D	0.148	2-3/4	1LB x 25Packets: 64 Ctns / Pallet
Duplex 12D	12D 0.148 2-7		5LB x 8Packets: 42 Ctns / Pallet 50LB: 48 Ctns / Pallet
Duplex 16D	0.162	3	, , , , , , , , , , , , , , , , , , , ,
Duplex 20D	0.189	3-1/2	

FINISH NAILS

Applications: Finish nails are those made for interior trim, finish carpentry, cabinetwork, and furniture building. Their small cupped head help to position the nail set to counter shank the head of the nail below the surface of the wood.

Material: Steel

Shank Type: Round Smooth Shank

Head Type: Brad Head

Point Type: Diamond Point

Finish: Bright

Standard: ASTM F1667



Item	Diameter	Length	Packaging
Finish 2D	0.058	1	
Finish 3D	0.067	1-1/4	
Finish 4D	0.072	1-1/2	
Finish 5D	0.072	1-3/4	
Finish 6 D	0.092	2	1LB x 25Packets: 64 Ctns / Pallet
Finish 7D	0.092	2-1/4	5LB x 8Packets: 42 Ctns / Pallet
Finish 8D	0.099	2-1/2	50LB: 48 Ctns / Pallet
Finish 10D	0.113	3	
Finish 12D	0.113	3-1/4	
Finish 16D	0.120	3-1/2	
Finish 20D	0.135	4	

ROOFING NAILS

Applications: Roofing Nails are designed for the application of asphalt and fiberglass shingles on new construction and re roofing jobs. Roofing nails are corrosion resistant. Their broad heads resist pulling through shingles during high wind.

Material: Carbon Steel

Shank Type: Round Smooth Shank

Head Type: Flat Reinforced Head

Point Type: Diamond Point

Finish: Bright, Zinc or other coating as specified

Standard: ASTM F1667



Item	Diameter	Length	Packaging
Roofing 5/8"	0.120	5/8	
Roofing 3/4"	0.120	3/4	
Roofing 7/8"	0.120	7/8	
Roofing 1"	0.120	1	
Roofing 1-1/4"	0.120	1-1/4	1LB x 25Packets: 64 Ctns / Pallet
Roofing 1-1/2"	0.120	1-1/2	5LB x 8Packets: 42 Ctns / Pallet
Roofing 1-3/4"	0.120	1-3/4	50LB: 48 Ctns / Pallet
Roofing 2"	0.120	2	
Roofing 2-1/4"	0.120	2-1/4	
Roofing 2-1/2"	0.120	2-1/2	
Roofing 3"	0.120	3	

JOIST HANGER NAILS

Applications: Joist Hangers nails are specially made for use with joist hangers.

These nails have specific head sizes, thickness, and steel and shank designs.

Material: Carbon Steel

Shank Type: Round Smooth and Barbed Shank

Head Type: Flat Head

Point Type: Diamond Point

Finish: Bright, Zinc or other coating as specified

Standard: ASTM F1667



Item	Diameter	Length	Packaging			
Joist 1-1/4" x 11 GA	0.120	1-1/4				
Joist 1-1/4" x 9 GA	0.148	1-1/4	1LB x 25Packets: 64 Ctns / Pallet			
Joist 1-1/2" x 11 GA	0.120	1-1/2	5LB x 8Packets: 42 Ctns / Pallet			
Joist 1-1/2" x 10-1/4 GA	0.131	1-1/2	50LB: 48 Ctns / Pallet			
Joist 1-1/2" x 9 GA	0.148	1-1/2				

DECKING NAILS

Applications: Decking Nails are designed with a slightly domed head, to ensure the outer perimeter of the nail head just penetrates the timber and therefore eliminates any protrusion, which may affect foot traffic. The helical threaded shank provides for vastly improved holding power to ensure the decking timber is hold down firmly.

Material: Carbon Steel

Shank Type: Round Smooth & Mechanically Deformed Shank

Head Type: Casing Head **Point Type:** Diamond Point

Finish: Bright, Zinc or other coating as

specified

Standard: ASTM F1667



Item	Diameter	Length	Packaging
Deck 6D	0.120	2	
Deck 8D	0.120	2-1/2	
Deck 10D	0.135	3	1LB x 25Packets: 64 Ctns / Pallet
Deck 12D	0.135	3-1/4	5LB x 8Packets: 42 Ctns /Pallet 50LB: 48 Ctns / Pallet
Deck 16D	0.148	3-1/2	, , , , , , , , , , , , , , , , , , , ,
Deck 20D	0.177	4	

CASING NAILS

Applications: Casing Nails with their deep, wedge shaped heads, are used for interior trim, finish carpentry, cabinet making and furniture.

Material: Carbon Steel

Shank Type: Round Smooth shank

Head Type: Flat counter sunk cupped head

Point Type: Diamond Point

Finish: Bright or zinc coated

Standard: ASTM F1667

Item	Diameter	Length	Packaging
Casing 4D	0.080	1-1/2	
Casing 6 D	0.099	2	
Casing 7D	0.099	2-1/4	1LB x 25Packets: 64 Ctns / Pallet
Casing 8D	8D 0.113 2-1		5LB x 8Packets: 42 Ctns / Pallet
Casing 10D	0.128	3	50LB: 48 Ctns / Pallet
Casing 12D	0.128	3-1/4	
Casing 16D	0.135	3-1/2	

DRYWALL NAILS

<u>Applications:</u> The wide, heads on these hammers create a dimple around the nail head that facilitates the application of joint compound. This nails are designed to attach drywall to wooden.

Material: Carbon Steel

Shank Type: Round Smooth & mechanically

deformed shank

Head Type: Flat slightly counter sunk head

Point Type: Diamond Point

Finish: Bright


Standard: ASTM F1667



Item	Diameter	Length	Packaging
Drywall 1-1/4" x 12.5G	0.099	1-1/4	
Drywall 1-3/8" x 12.5G	0.099	1-3/8	
Drywall 1-1/2" x 12.5G	0.099	1-1/2	1LB x 25Packets: 64 Ctns / Pallet 5LB x 8Packets: 42 Ctns / Pallet
Drywall 1-5/8" x 12.5G	0.099	1-5/8	50LB: 48 Ctns / Pallet
Drywall 1-34" x 12.5G	0.099	1-3/4	
Drywall 2" x 12.5G	0.099	2	

21° PLASTIC COLLATED STRIP NAILS

Applications: Framing, Sheathing, Sub Floors, Roof Decking

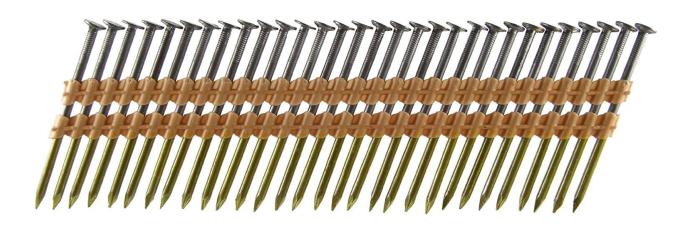

Material: Carbon Steel

Shank Type: Round Smooth, Ring

& Screw Shank

Head Type: Flat Head

Point Type: Diamond Point

Finish: Bright, Electro galvanizing

& Hot Dip Galvanizing



Item	Size	Diameter	Length	Nails /Strip	Qty/Ctns	Ctns/Pallet
	0.113" x 2"	0.113	2	25		
	0.113" x 2-1/8"	0.113	2-1/8	25		
	0.113" x 2-1/4"	0.113	2-1/4	25		
	0.113" x 2-3/8"	0.113	2-3/8	25		
	0.113" x 2-1/2"	0.113	2-1/2	25		
	0.120" x 2-3/8"	0.120	2-3/8	25		
	0.120" x 2-1/2"	0.120	2-1/2	25		
	0.120" x 2-3/4"	0.120	2-3/4	25	4M, 5M	48
	0.120" x 3"	0.120	3	25		
21° Plastic	0.120" x 3-1/4"	0.120	3-1/4	25		
Collated Nails	0.131" x 3"	0.131	3	25		
	0.131" x 3-1/4"	0.131	3-1/4	25		
	0.131" x 3-3/8"	0.131	3-3/8	25		
	0.131" x 3-1/2"	0.131	3-1/2	25		
	0.148" x 3"	0.148	3	25		
	0.148" x 3-1/4"	0.148	3-1/4	25		
	0.148" x 3-1/2"	0.148	3-1/2	25		
	0.162" x 3"	0.162	3	25		
	0.162" x 3-1/4"	0.162	3-1/4	25		
	0.162" x 3-1/2"	0.162	3-1/2	25		

Note: All Dimensions are in Inch

OFFER BEST FIT TOOLS:

HITACHI: NR83AA3, NR90AC2

GRIPRITE: GRTRH350, **DUOFAST**: NSP350F1

DUOFAST: NSP350F, **SENCO:** SN60 **STANLEY:** F21PL, **MAKITA:** AN922 Most other 21° Plastic Strip Nailers

15° WIRE COLLATED COIL NAILS

Applications: Framing, Sheathing, Sub Floors, Roof Decking





Material: Carbon Steel

Shank Type: Round Smooth, Ring & Screw Shank

Head Type: Flat Head

Point Type: Diamond, Blunt Diamond, Chisel Point

Finish: Bright, Electro galvanizing and Hot Dip Galvanizing

Item	Size	Diameter	Length	Nails /Coil	Qty/Ctns	Ctns/Pallet
	0.113" x 2-3/8"	0.113	2-3/8			
	0.113" x 2-1/2"	0.113	2-1/2	200, 225,	3M, 4M, 4.5M,	35, 42, 48
	0.120" x 2-1/2"	0.120	2-1/2			
15° Wire	0.120" x 3"	0.120	3			
Collated Framing	0.120" x 3-1/4"	0.120	3-1/4			
Coil Nails	0.131" x 2-1/2"	0.131	2-1/2	250	4.5W, 5M	
	0.131" x 3"	0.131	3		3	
	0.131" x 3-1/4"	0.131	3-1/4			
	0.131" x 3-1/2"	0.131	3-1/2			

Note: All Dimensions are in Inch


OFFER BEST FIT TOOLS:

GRIP RITE: GRTCN70. GRTCN90

HITACHI: NV90AB2, **BOSTICH:** N80CB-1 Most other 15° Wire Coiler Nailers

15° WIRE COLLATED PALLET COIL NAILS

Applications: Pallet Nails are designed for Construction and repair of wood Pallets.

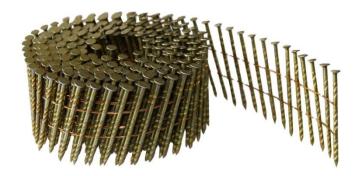

Material: Carbon Steel

Shank Type: Round Smooth, Ring & Screw Shank

Head Type: Flat Head

Point Type: Diamond, Blunt Diamond

Finish: Bright



Item	Size	Diameter	Length	Nails /Coil	Qty/Ctns	Ctns/Pallet
	0.099" x 1-1/2"	0.099	1-1/2		6M,	
15° Wire Collated Pallet Coil Nails	0.099" x 2"	0.099	2	250, 9M, 300 7.2M,	,	42
	0.099" x 2-1/4"	0.099	2-1/4		•	
	0.099" x 2-3/8"	0.099	2-3/8		12M	

Note: All Dimensions are in Inch

OFFER BEST FIT TOOLS:

GRIP RITE: GRTCN70. GRTCN90

HITACHI: NV90AB2, BOSTICH: N80CB-1


Most other 15° Wire Coiler Nailers

15° WIRE COLLATED SIDING/FENCING COIL NAILS

Applications: Framing, Sheathing, Sub Floors,

Roof Decking



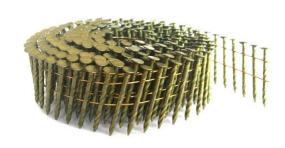

Material: Carbon Steel

Shank Type: Round Smooth, Ring & Screw Shank

Head Type: Flat Head

Point Type: Diamond, Blunt Diamond

Finish: Bright, Electro galvanizing and Hot Dip Galvanizing

Item	Size	Diameter	Length	Nails /Coil	Qty/Ctns	Ctns/Pallet
	0.083" x 1-1/4"	0.083	1-1/4		3.6M, 9M, 10.5M, 14M,	42, 48
	0.083" x 1-1/2"	0.083	1-1/2	348, 300, 10 350 1		
	0.083" x 1-3/4"	0.083	1-3/4			
	0.086" x 1-1/4"	0.086	1-1/4			
	0.086" x 1-3/4"	0.086	1-3/4			
	0.086" x 2"	0.086	2			
	0.090" x 1-1/2"	0.090	1-1/2			
	0.090" x 1-3/4"	0.090	1-3/4			
15° Wire	0.090" x 2"	0.090	2			
Collated	0.090" x 2-3/16"	0.090	2-3/16			
Siding /Fencing Coil	0.090" x 2-1/4"	0.090	2-1/4			
Nails	0.090" x 2-3/8"	0.090	2-3/8		16M	
	0.090" x 2-1/2"	0.090	2-1/2			
	0.092" x 1-1/2"	0.092	1-1/2			
	0.092" x 1-3/4"	0.092	1-3/4			
	0.092" x 2"	0.092	2			
	0.092" x 2-3/16"	0.092	2-3/16			
	0.092" x 2-1/4"	0.092	2-1/4			
	0.092" x 2-3/8"	0.092	2-3/8			
	0.092" x 2-1/2"	0.092	2-1/2			

Note: All Dimensions are in Inch

OFFER BEST FIT TOOLS:

HITACHI: N65AH, BOSTICH: N66C

RN46 **MAX:** CN55

Most other 15° Wire Coiler Nailers

15° WIRE COLLATED ROOFING COIL NAILS

Application: Roofing Nails are designed for the application of asphalt and fiberglass shingles on new construction and re roofing jobs. Roofing nails are corrosion resistant. Their broad heads resist pulling through shingles during high wind.





Material: Carbon Steel

Shank Type: Round Smooth Shank

Head Type: Flat Reinforced Head

Point Type: Diamond Point

Finish: Bright, Zinc or other coating as specified

Standard: ASTM F1667

Item	Size	Diameter	Length	Nails /Coil	Qty/Ctns	Ctns/Pallet
15° Wire Collated Roofing Nails	0.120" x 3/4"	0.120	3/4	120	7.2M	40, 48, 56
	0.120" x 7/8"	0.120	7/8			
	0.120" x 1"	0.120	1			
	0.120" x 1-1/4"	0.120	1-1/4			
	0.120" x 1-1/2"	0.120	1-1/2			
	0.120" x 1-3/4"	0.120	1-3/4			

Note: All Dimensions are in Inch


OFFER BEST FIT TOOLS:

HITACHI: NV45AE

Most other 15° Wire Coiler Nailers

33° PAPER TAPE CLIPPED HEAD NAILS

Application: They have their heads clipped into halves so that more nails are there in the gun. It can occupy less space than the round head nails. They also have separate nail guns. The difference between both the nail guns is that these have a higher magazine.

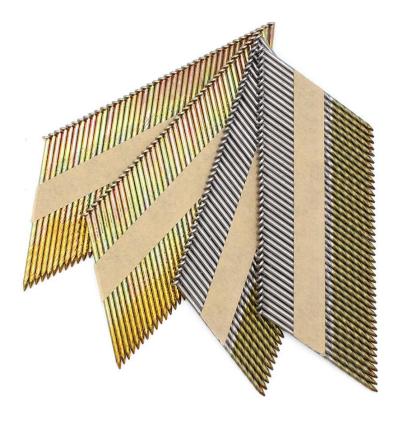

Material: Carbon Steel

Shank Type: Round Smooth, Ring & Screw Shank

Head Type: Clipped Head (D Head)

Point Type: Diamond Point

Finish: Bright, Zinc or other coating as specified

Standard: ASTM F1667



Item	Size	Diameter	Length	Nails /Strip	Qty/Ctns	Ctns/Pallet
33° Paper Tape Clipped Head Nails	0.113" x 2-3/8"	0.113	2-3/8	25	2M, 2.5M, 3M, 4M, 5M	48 <i>,</i> 100
	0.113" x 2-1/2"	0.113	2-1/2	25		
	0.120" x 2-3/8"	0.120	2-3/8	25		
	0.120" x 2-1/2"	0.120	2-1/2	25		
	0.120" x 3"	0.120	3	25		
	0.120" x 3-1/4"	0.120	3-1/4	25		
	0.131" x 2-1/2"	0.131	2-1/2	25		
	0.131" x 3"	0.131	3	25		
	0.131" x 3-1/4"	0.131	3-1/4	25		
	0.131" x 3-1/2"	0.131	3-1/2	25		

Note: All Dimensions are in Inch

OFFER BEST FIT TOOLS:

SENCO: PRO701XP, **HITACHI:** NR83AA2 **GRIP RITE:** GRTCH350, **DEWALT:** 51823

BOSTICH: F33PT **PASLODE:** F350S

Most other 33° Paper Tape Clipped Head Nailers